

DETAIL 02722-1

COBB COUNTY WATER SYSTEM


SEWER TRENCH BEDDING DETAIL

JULY 24, 2003

AGENCY DIRECTOR

BACKFILL COMPACTION (STD. PROCTOR)

- A. UNPAVED AREA - 90%
- B. SIDEWALK AREA - 95%
- C. PAVED AREA - 98%

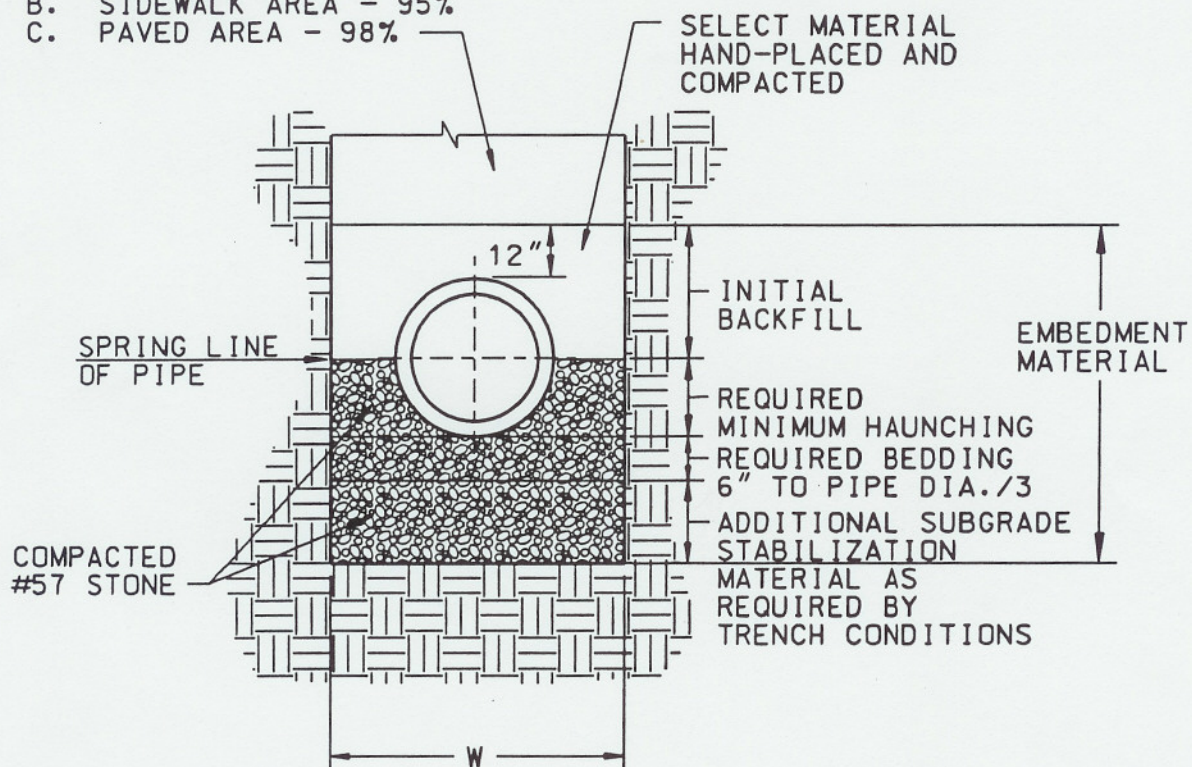

W = TRENCH WIDTH DEFINED AS NOMINAL PIPE
OUTSIDE DIAMETER PLUS TWO FEET FOR MEASUREMENT
AND PAYMENT OF ADDITIONAL SUBGRADE STABILIZATION
MATERIAL ALLOWANCE AND/OR ROCK EXCAVATION
ALLOWANCE (AS APPLICABLE AND AS AUTHORIZED)