CALL DOT OPERATIONS, 770-528-1675 FOR CLARIFICATION

CROSSWALK DETAIL

All Striping 8" Solid White Thermoplastic

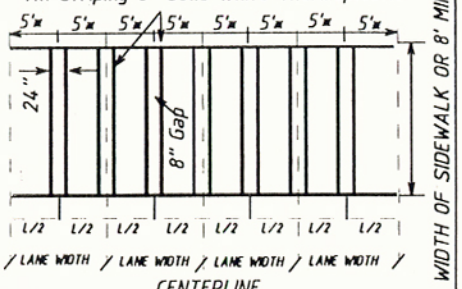

CENTERLINE

USED WHEN THE LANE WIDTH EXCEEDS 12' OR NO STRIPES EXIST

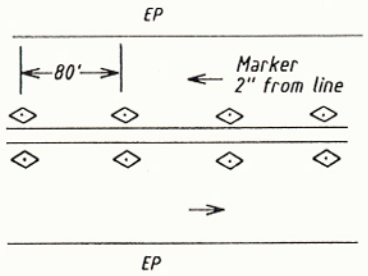

Centerline Patterns

RPM/Stripe System, Multilane, Two-way

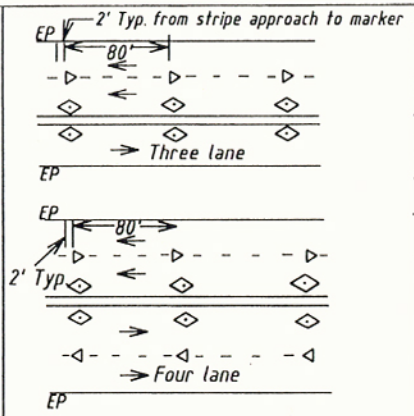

RPM Pattern for 2-Way Roads

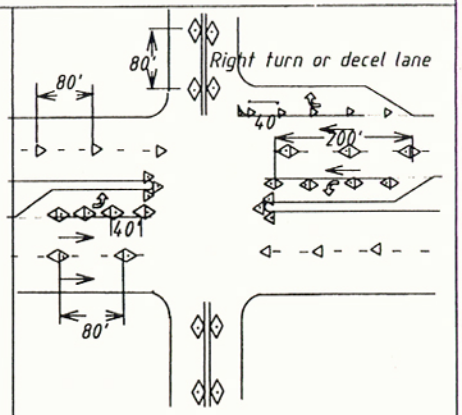

RPM patterns for left turn lanes at Medians

NOTE: ALL RPM'S SHALL BE STIMSONITE 948 OR EQUAL.

LEGEND

- TYPE 1 TWO-WAY YELLOW RPM
- TYPE 1 TWO-WAY WHITE RPM
- TYPE 2 ONE-WAY YELLOW RPM
- TYPE 2 ONE-WAY WHITE RPM
- TYPE 3 WHITE/RED RPM
- DIRECTIONAL ARROW
- PAVEMENT ARROW
- TYPE 10 8" REFLECTIVE WHITE SYMMETRIC MARKER
- SKIP LINE OR SOLID LINE

NOTE: Type 3 Markers only to be placed within 240' from intersections.

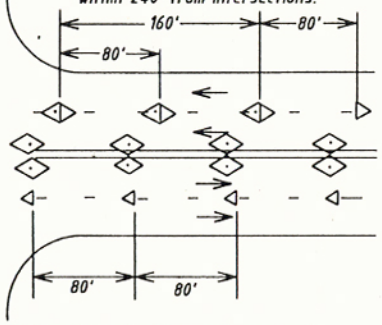

RPM pattern for intersection approach Four lane, 2-way roads.

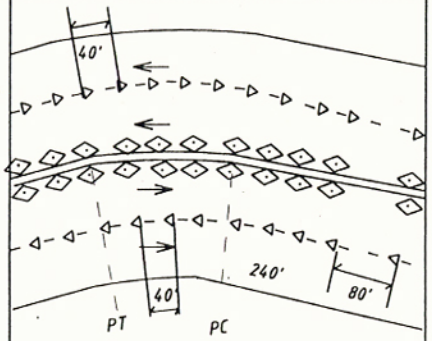

RPM pattern for horizontal curves 6 Degrees or greater curvature (Dc).

Reflective portion of marker to be installed facing traffic. Markers to be placed only in islands where stop signs will be erected inside striped island.

Tp 10 markers 2' from outside line

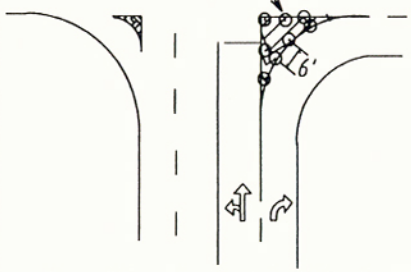

Symmetric marker in striped island.

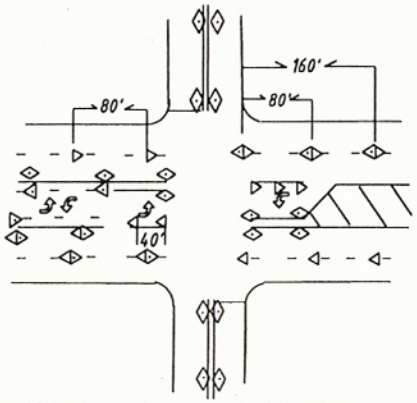

RPM patterns for two-way left turn lanes and left turn lane.

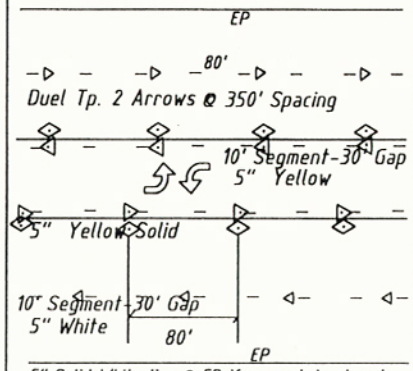

5" Solid White line @ EP if no curb is placed

Striping & RPM design for duel left turn lane

DEPARTMENT OF TRANSPORTATION

COBB COUNTY STATE OF GEORGIA

Raised Pavement Markers

DETAIL 401R

600-25

...\Microstation\STD401R.dgn 10/03/00 02:11:57 PM